


CURVED




STANDING SEAM PROFILE



CLIP FASTENER




FASTENER/CLIP/ANCHOR SYSTEM

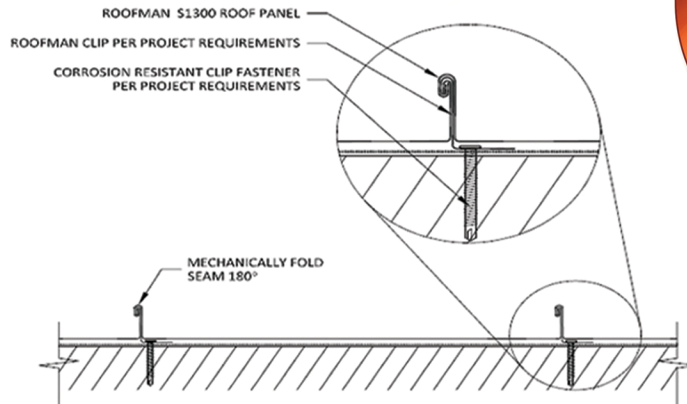

This panel is durable, leak proof and can withstand winds up to 150 mph. Is not perforated or compromised in any way and will last forever.

PANEL SECTION

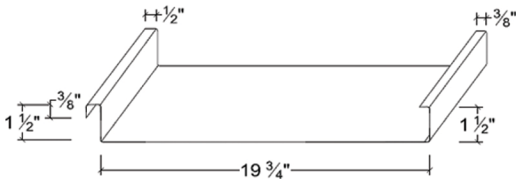

Base Metal	ZINCALUME ASTM 792M
Tensile Strength	50000 PSI
Aluzinc Coating	ALUZINC Az150 Gms/sq meter
Paint Coat	Pretreatment: Corrosion Resistance - Polyester, PVF2, Kynar 500
Primer Top & Reverse	25% Gloss 20µ over 5µ Primer
	Reverse 10µ over 5µ Primer - According to AAMA - 605 Specification
Fastening System	24GA 1 1/2" Butterfly Clip with Min 1" Steel / wood 10-13 self drilling pancake screws
	Tolerance on stated Values +/- 1%

STRUCTURAL STANDING SEAM PANEL

MATERIAL SPECIFICATION	MM		INCH	
	Panel Width	610		24
Panel Coverage	502		19.75	
Thickness	Weight		Purlin Spacing	
Wire Gauge	Lb/Ft	Kg/M	MM	Inch
24 Ga	.60MM	1.87	2.78	609.6 24"
26 Ga	.50MM	1.51	2.25	609.6 24"

COLOURS AVAILABLE



*Actual colours may vary slightly